


Industrial Special Application

Model 3805

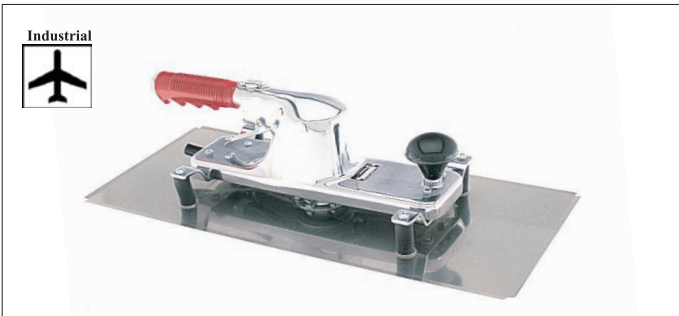

CM RASPER

ORBITAL ACTION. Contractors model 800. For rasping and leveling synthetic coatings on industrial surfaces. Dynamically balanced 8" X 18" aircraft aluminum pad supported by Hutchins 5-point suspension system provides 144 square inches of full contact sanding. Special-outriggers reduce vibration. Powered by Hutchins Air-Efficient Motor.

REPLACEMENT BASE:

1804CM Std. Base PSA Type paper **ONLY**

OTHER SPECIFICATIONS:

RPM: 8500+

Wt: 5lbs. 9oz.

Air Consumption: 11.4 cfm @ 90 PSI

Noise Level: 84 dBa

Model 3806



MARINE RASPER

ORBITAL ACTION. Designed for the marine industry for fairing plugs and hulls. The 8" X 18" cushioned pad with Heavy Duty Clips allows the technician to "Float" the Rasper over the surface to create the ultimate smooth, flat finish. When used with finer sandpapers, the Marine Rasper delivers excellent results for leveling woodworking finishes.

REPLACEMENT PADS:

1804-5CMB Std. for Production & PSA Type Paper

OTHER SPECIFICATIONS:

RPM: 8500+

Wt: 5lbs. 9oz.

Air Consumption: 11.4 cfm @ 90 PSI

Noise Level: 84 dBa

Model 4565



ORBITAL ACTION. Light weight and compact. Advanced technology Air-Efficient Motor delivers vibration free aggressive sanding. Removable handle included for added operator control. 4 - bearing suspension produces high torque for effortless sanding of any abrasive project. Oversized pad delivers over 40 square inches of full contact sanding.

Pad size 4 1/2" x 9" PSA

REPLACEMENT PADS:

5865R PSA

5864 Std for 4564 with 3 2/3 X 7 Pad

5864H Std for Velcro or Hookit Paper 3 2/3 X 7 Pad

OTHER SPECIFICATIONS:


RPM: 8500+

Wt: 3lbs. 8.2oz.

Air Consumption: 10.4 cfm @ 90 PSI

Noise Level: 80 dBa

Model 3800-4 & 4932-4

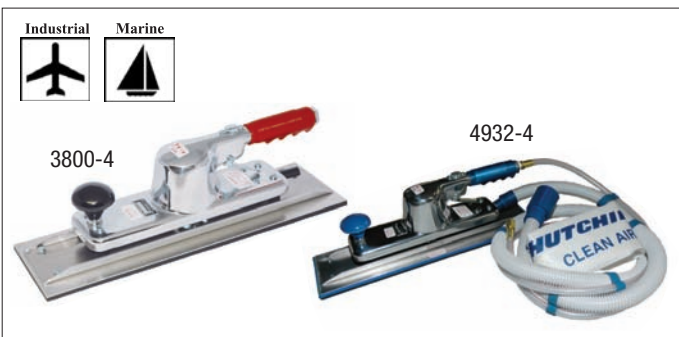

ORBITAL ACTION. Similar to the model 3806, the 3800-4 is designed for marine and Industrial applications where a larger footprint is required. The big 4 1/2" x 16" pad delivers a whopping 72 square inches of sanding surface. The additional surface area also adds stability to the tool for ease of operation. The powerful air-Efficient motor with 5 point suspension guarantees uniform, performance. For dust-free sanding, the multi-option model 4932-4H comes with 5' vac coaxial hose assy, collection bag and Hookit pad.

Pad size 4 1/2" x 16"

REPLACEMENT PADS:

5005 PSA pad

5005H Hookit pad

4932-4H replacement pad

5005HVA

OTHER SPECIFICATIONS:

RPM: 8500+

Wt: 5 lbs. 7 oz.

Air Consumption: 11.4 cfm @ 90 PSI

Noise Level: 89 dBa

NOTE:

Reverse hook pads available, see page 18.

Industrial Special Application

Model 3570

Automotive Industrial Marine Woodworking



3/16" Offset

The 3570 Random orbit sander is designed for industrial and production applications where high sanding speed is required. With a revolutionary motor design, the 3570 delivers ultra high speed sanding with legendary Hutchins balance and durability. Designed to deliver up to 30% more sanding performance than conventional sanders! Above models available in 5" & 6" hookit version. Add letter "H" behind model number. 6" is standard for hookit models.

REPLACEMENT PADS:
 5136 Std. 6"PSA
 5236 Opt 6"Hookit
 5135 Opt 5"PSA
 5235 Opt 5"Hookit
[3970/8670 replacement pads](#)
 5146 Std. 6"PSA
 5246 Opt 6"Hookit
 5145 Opt 5"PSA
 5245 Opt 5"Hookit
 8" pads available check page 18

OTHER SPECIFICATIONS:
 RPM: 13,000
 Air Consumption: 8.5
 Noise Level: 84 dBa

Model 3970 & 8970

Marine Woodworking



3970

8970



RANDOM ORBITAL ACTION The 3970 Random orbit sander is the same as our model 3570 except it is designed for Industrial and Hi-Production applications where high performance sanding and dust containment in conjunction with an external vacuum source is required. With a revolutionary motor design, the 3970 delivers Ultra high speed sanding with legendary Hutchins balance and durability. Designed with a captive pad orbit, the 3970 delivers up to 40% more sanding performance and 50% faster operating speed. The 3970 is Vacuum ready out-of-the box and connects to all major vacuum system systems. Comes with patented built-in pad release.

RANDOM ORBITAL SANDER The 8970 Random orbit sander is designed for Industrial and Hi-Production applications where high performance sanding and dust containment without a vacuum source is required. With a revolutionary motor design, the 8970 delivers ultra high speed sanding with legendary Hutchins balance and durability. Designed with a captive pad orbit, the 8970 delivers up to 40% more sanding performance and 50% faster operating speed than conventional sanders! The 8970 is a Multi-Option design and does not require a vacuum source for dust collect. Optional pads and dust collection bags can be purchased to increase the 8970's dust extraction capabilities. Comes with the patented built-in pad release button.

REPLACEMENT PADS:
 5146 Std. 6"PSA
 5246 Opt. 6"Hookit Pad
 5145 Opt. 5"PSA
 5245 Opt. 5"Hookit Pad
 5028 Opt. 8"PSA
 5028H Opt. 8"Hookit Pad
 5245-11 Opt 11 hole pad
 5246-19 Opt 19 hole pad

REPLACEMENT ACCESSORIES:
 1347, 1347-1, 1348
 5246-11PP pad protector
 5246-19PP pad protector
OTHER SPECIFICATIONS:
 RPM: 13,000
 Wt: 6 lbs. 2.5 oz.
 Air Consumption: 8.5cfm @ 90 PSI
 Noise Level: 90dBa


Model 2000-4H & 4920-4H

Marine Woodworking



2000-4H

4920-4H

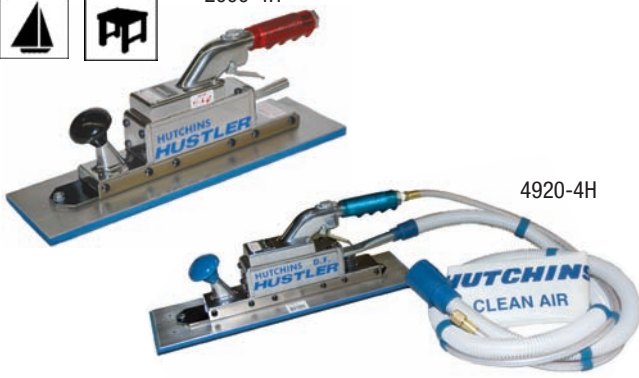

The 2000-4H shares the same innovative construction as the model 2000 but tailored for larger surfaces. The strong 15/16" stroke of the 2000-4H is aggressive enough to level hard woods while offering the operator enough control to sand the most delicate veneers. The linear straight-line sanding action virtually eliminates cross-grain sanding "Pig Tails". The large 4 1/2" x 16" Velcro pad insures a smooth flat finish with any abrasive. **Pad Size: 4 1/2" x 16" Hookit Pad.** Also available as Multi-Option. Order Model 4920-4H

REPLACEMENT PADS:
 5005 PSA
 5005-H Hookit Pad
[4920-4H replacement pad](#)
 5005HVA
OTHER SPECIFICATIONS:
 SPM: 3000
 Wt: 6 lbs. 2.5 oz.
 Air Consumption: 6.2cfm @ 90 PSI
 Noise Level: 90dBa